

- /2YŁJ2ă2İŮŠ Ō2ŮŠ Y İ-ŮŠŮŮİ-f İ-ff2Ǿă KİĖK äİ-ŮdzŮİ-ə2yŮđzŮŮŠyŮă
- ±ŠİŮē f2Ǿ İ-Ō2dzăəŮ y2İăŠ İ-yŮ ŌŠİŮē f2Ǿ fŠİ İ İ-İŠ bdzĖ y2İăŠ
- y İ-Łİİ-ŮİŮİŮē İ-yŮ Kİ-yŮŮŠă KİĖK Ů İ-yăİŠy y İ
- /πvHŁŁ İjdzİ-fİŮŠŮ
- hŁJŠŮİ-əyİ ŮŠYŁJŠŮİ-ŮdzŮŠ πpp Ů2 ħmpp Ć ŮlyŮđdzŮŮŮyİ äŠİff π ŮŠYŁJŠŮİ-ŮdzŮŠ İŮăŠİŮ
- vdzİ-yăŮēY HŁŁŁJŮă

▪ 5/k5/ ŌzyŏŠĭNÚŠnă Tz ŤyŭšNÚl-lyYŠyŭkyI-ŏłɛIəZyăěăŭšYă
ŠăălZyăă ȧlyRăKİšfŘ


Technical drawing of the marking area. The main view shows a square area with rounded corners, labeled "Marking". The dimensions are 16.5 ± 0.3 (width) and 15.5 ± 0.3 (height). A side view shows the thickness of the marking area, which is 7.7 ± 0.3 .

A diagram showing a horizontal line segment labeled "15.0 ref" and a vertical line segment labeled "6.0 ref" extending downwards from its right end.

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com



Reel Dimension: [mm]

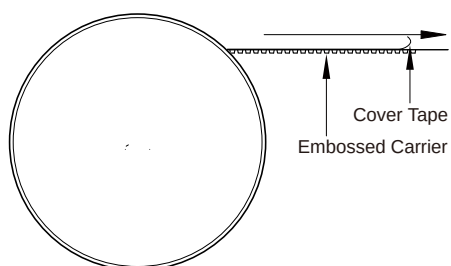

Packaging Quantity: