

TLAR Series

Molding Power Inductors

Size 100760



FEATURES

- Compliant for 100% Lead(Pb)-Free and RoHS.
-
-
-

APPLICATION


-
-
-
-

Dimensions: [mm]

tL-NU b2		LyRdzÖül-yÖŠ ó> I ú							
	1		0.14	0.16	68		88		
			0.14	0.16	68		88		


All test data is referenced to 25 °C ambient.
 Saturation Current will cause L0 to drop approximately 30%.
 Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40\text{ }^{\circ}\text{C}$.

Soldering Reflow:

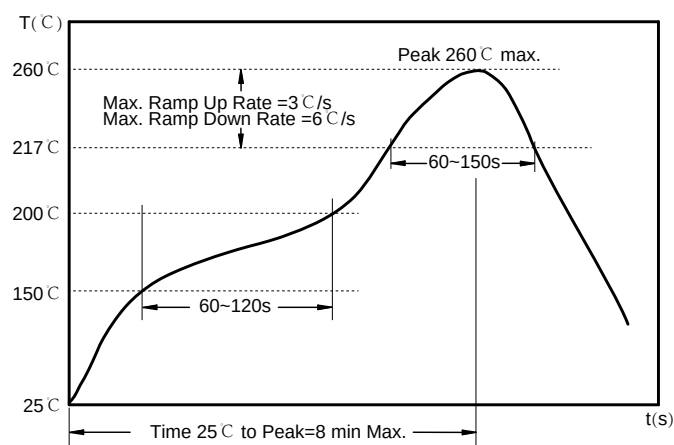

Packaging Information:

Tape Dimension:

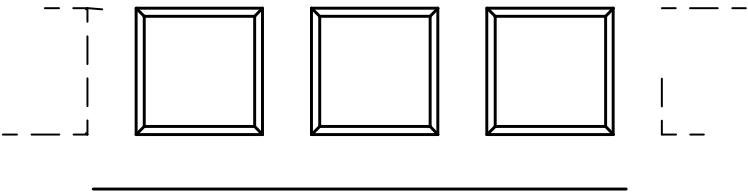

A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)

Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

Cautions and Warnings:

Storage Conditions :

-

Operation Instructions: